


# Turbo Boost Your Nitro Infuser

The Enhanced Beverage Solutions' AfterBurner installs after your Nitro Infuser, right before the tap.

*(flip for installation instructions)*

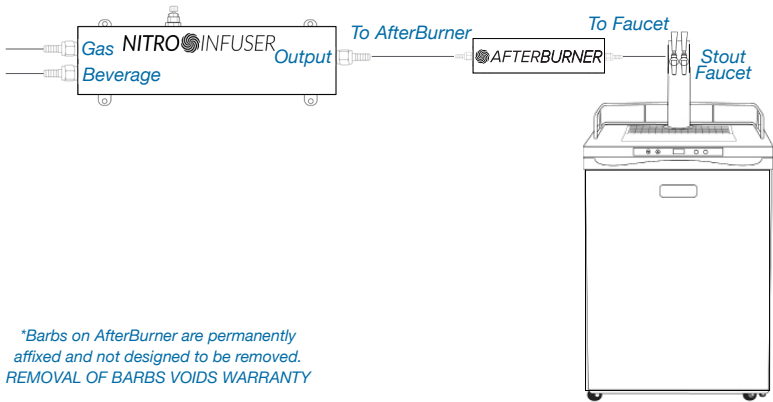

*\*Barbs on AfterBurner are permanently affixed and not designed to be removed.  
REMOVAL OF BARBS VOIDS WARRANTY*

# Installing Your AfterBurner

## Step 1: Preparation

If you are installing your AfterBurner in an existing system, the nitrogen gas must be shut off and depressurized, including the keg. Set the regulator to 0 psi. Open the tap faucet to release pressure.

## Step 2: Cut Beverage Line

Identify the line from the Nitro Infuser to the faucet. Cut the line at a point that will allow the AfterBurner to sit as close to the faucet as possible.

*Please note: If you have a particularly long draw, your AfterBurner will sit further away from your Nitro Infuser.*

## Step 3: Connect AfterBurner

Connect the line from the Nitro Infuser Output to the Afterburner Input. Secure with hoseclamp. Connect the line from the faucet to the AfterBurner Output. Secure with hoseclamp.

## Step 4: Repressurize

Repressurize your system to 28 psi and double check for leaks. Pour and enjoy!

## Cleaning

*Cleaning your tap lines will clean the system. It is recommended that you clean your tap lines every 1-2 weeks. It is recommended to remove your stout nozzle and rinse daily.*