



# Kalinka-Ice




## Standard Features


- ▶ Easy to Install, service and maintain
- ▶ Large condenser for warm ambient conditions
- ▶ Digital thermostat
- ▶ High-Efficiency evaporator shaped for optimal use of the glycol bath

## Specifications

|                       |            |                          |
|-----------------------|------------|--------------------------|
| Name                  | Unit       | Kalinka-Ice              |
| Part                  |            | KG-1/6VP                 |
| Maximum Distance      | FT         | Up to 25'                |
| Capacity, (evap 20 F) | BTU/HR     | 1150                     |
| Tank Capacity         | Gal        | 2                        |
| Dedicate Circuit      | AMP        | 15                       |
| Voltage               | Volt/Hz    | 115/60                   |
| Compressor Power      | H/P        | 1/6                      |
| Thermostat            | Type       | Dixell                   |
| Pump Type             |            | Mid-5                    |
| Refrigerant           | Type       | R134a                    |
| Refrigerant Amount    | Lbs        | 0,298                    |
| Dimensions            | Width, in  | 18,2                     |
|                       | Depth, in  | 18,2                     |
|                       | Height, in | 13,7                     |
| Weight (net/gross)    | Lbs        | 45/51,7                  |
| Glycol Mixture        | %          | 40% Glycol,<br>60% Water |

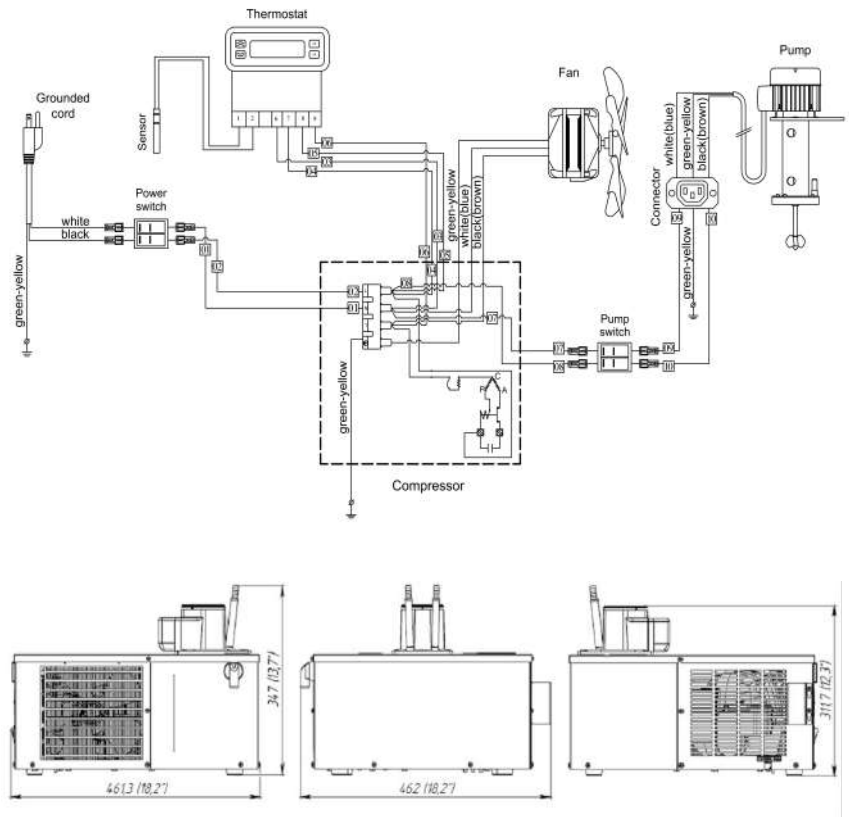

# Kalinka-Ice

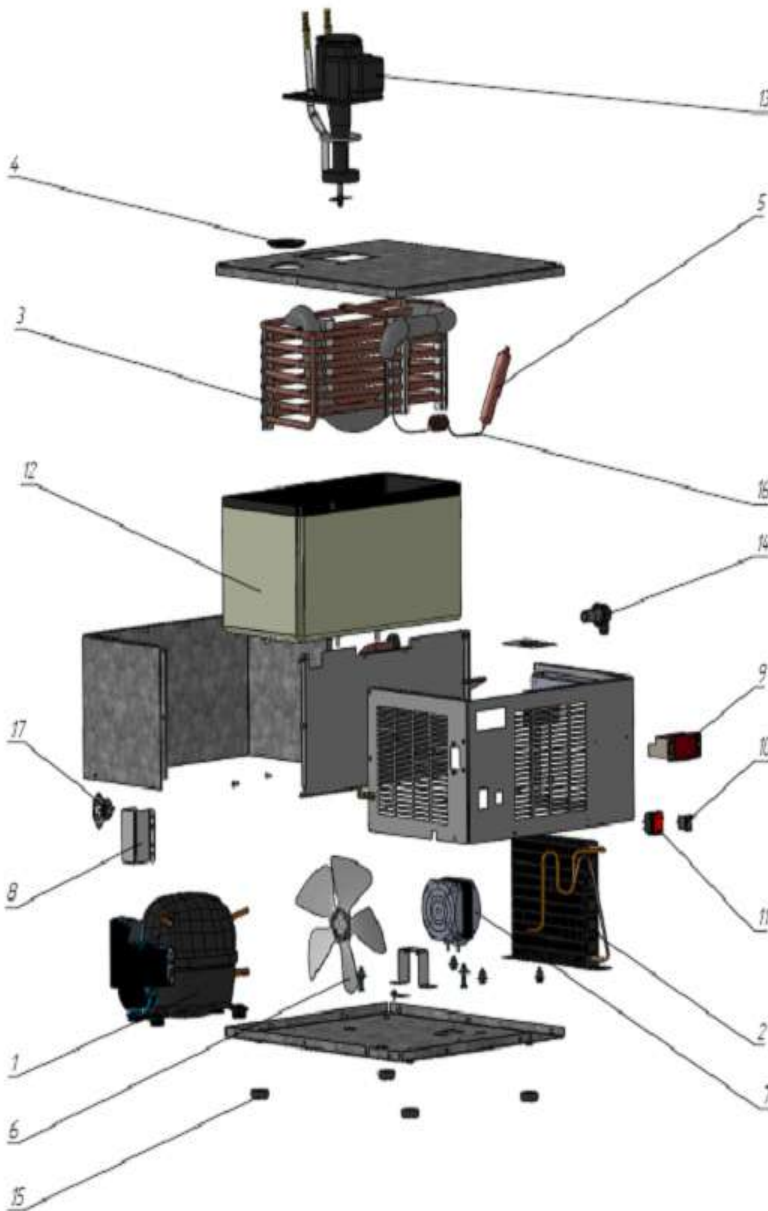

|    |                                                             |
|----|-------------------------------------------------------------|
| 1  | Compressor "Tecumseh" THB4419YXA TH75IAZ (115V,60Hz)        |
| 2  | Air Condenser "KARYER" (or "LU-VE") STFT 12118              |
| 3  | Evaporator                                                  |
| 4  | Cap                                                         |
| 5  | Drier-filter DE.NA GR15 6.1/2.1                             |
| 6  | Impeller Ø200, α=28°                                        |
| 7  | Electric motor "EBM" M4Q045-BD-03-04 (115V, 60Hz)           |
| 8  | Protective Casing                                           |
| 9  | Thermostat Dixell XR02CX-4N0F1 (115V/60 HZ 20A)             |
| 10 | Pump switch "Arcoelectric" C6053AL GREEN                    |
| 11 | Power switch "Arcoelectric" Mouser Electronics R13-117 RED  |
| 12 | Glycol bath                                                 |
| 13 | Glycol pump "Saber" Mid-5 (or "Totton" SPC 17/4), 115V/60Hz |
| 14 | Overflow                                                    |
| 15 | Foot                                                        |
| 16 | Throttle                                                    |
| 17 | Connector R302SN (250V/10A)                                 |

